



Trelleborg tyres and complete wheel solutions





Radial range TM Tyres



TM for DRIVE WHEELS

TM1000 HIGH POWER

**BLUE TIRE
TECHNOLOGY**

New

Designed using Trelleborg BLUE TIRE technology, the new TM1000 High Power redefines standards within the agricultural industry.

Developed to fully respect the environment, the TM1000 High Power BLUE TIRE is the perfect solution for sustainable farming.

IF 600/70R30	159D
IF 650/60R34	159D
IF 650/65R34	161D
IF 710/60R34	164D
IF 650/65R38	163D
IF 710/60R38	172D
IF 710/70R42	179D
IF 710/75R42	176D
IF 900/60R42	180D
IF 750/75R46	180D *
IF 900/65R46	190D *

* = In preparation



TM for DRIVE WHEELS

TM900 HIGH POWER

Co-designed with the main agricultural machine manufacturers, it's designed for tractors from 250 to 400 hp at speeds of up to 65 km/h.

Good traction, excellent self-cleaning capability, comfort, low rolling resistance and low fuel consumption make the new Trelleborg TM900 High Power the most advanced extra large agricultural radial tyre.

KEY FEATURES:

- increased productivity
- overall savings
- excellent self-cleaning
- best comfort

600/70R28	157D (154E)
600/70R30	158D (155E)
710/60R30	162D (159E)
600/70R34	160D (157E)
650/60R34	159D (156E)
710/60R34	164D (161E)
650/75R38	169D (166E)
650/85R38	173D (170E)
800/70R38	178D (175E)
900/60R38	178D (175E)
710/70R42	173D (170E)
710/70R42	179A8 *
710/75R42	175D (172E)
900/60R42	180D (177E)

* = For harvesting applications



TM for DRIVE WHEELS

TM800

With its outstanding field and road performance, the TM800 has been developed for high power tractors.

KEY FEATURES:

- excellent traction
- superior load capability at high speeds
- reduced soil compaction
- ride comfort and safety on the road
- excellent durability in all working conditions

440/65R24	128D
480/65R24	133D
540/65R24	140D
540/65R24	146A8 *
540/65R26	141D
440/65R28	131D
480/65R28	136D
540/65R28	142D
600/65R28	147D
540/65R30	143D
540/65R34	145D
600/65R34	151D
540/65R38	147D
600/65R38	153D
650/65R38	157D
710/70R38	166D
710/70R38	166D **
600/65R42	154D
650/65R42	158D

New

TM800 HS

540/65R28	149D (146E) HS
600/65R28	154D (151E) HS
540/65R30	150D (147E) HS
540/65R34	152D (149E) HS
600/65R34	157D (154E) HS
540/65R38	153D (150E) HS
650/65R38	163D (159E) HS
710/70R38	171D (168E) HS

* = For harvesting applications

** = For sugarcane applications



TM for DRIVE WHEELS

TM700

Well known /70 line for its performance and versatility, it is also available in high speed orchard and vineyard versions.

KEY FEATURES:

- maximum self-cleaning
- excellent handling and comfort on the road
- excellent traction
- good even wear

260/70R16	109A8 (109B)	
280/70R16	112A8 (112B)	
280/70R18	114A8 (114B)	
300/70R20	110A8 (110B)	
320/70R20	113A8 (113B)	
360/70R20	120A8 (120B)	
380/70R20	122A8 (122B)	
320/70R24	116A8 (116B)	
360/70R24	122A8 (122B)	
380/70R24	125A8 (125B)	
420/70R24	130A8 (130B)	
480/70R24	138A8 (138B)	
480/70R26	139A8 (139B)	
320/70R28	119A8 (119B)	
360/70R28	125A8 (125B)	
380/70R28	127A8 (127B)	
420/70R28	133D	
480/70R28	140D	
480/70R28	145D (148A8)	
420/70R30	134A8 (134B)	
480/70R30	141D	
520/70R30	145A8 (145B)	
480/70R34	143A8 (143B)	
520/70R34	148A8 (148B)	
480/70R38	145A8 (145B)	
520/70R38	150D	
580/70R38	155D	
580/70R42	158D	
620/70R42	166D	
TM700 HS		
480/70R30	147D (144E) HS	
520/70R30	151D (148E) HS	



Printed on
recycled paper



Radial range TM Tyres



TM for DRIVE WHEELS

TM600

Standard series tyre with metric size designed for tubeless fitment.

KEY FEATURES:

- optimal load capacity and traction
- maximum comfort on the road
- minimum soil compaction, maximum flotation
- excellent self-cleaning

280/85R20	112A8 (109B)	(11.2R20)
320/85R20	119A8 (116B)	(12.4R20)
280/85R24	115A8 (112B)	(11.2R24)
320/85R24	122A8 (119B)	(12.4R24)
340/85R24	125A8 (122B)	(13.6R24)
380/85R24	131A8 (128B)	(14.9R24)
420/85R24	137A8 (134B)	(16.9R24)
280/85R28	118A8 (115B)	(11.2R28)
320/85R28	124A8 (121B)	(12.4R28)
340/85R28	127A8 (124B)	(13.6R28)
380/85R28	133A8 (130B)	(14.9R28)
420/85R28	139A8 (136B)	(16.9R28)
380/85R30	135A8 (132B)	(14.9R30)
420/85R30	140A8 (137B)	(16.9R30)
460/85R30	145A8 (142B)	(18.4R30)
380/85R34	137A8 (137B)	(14.9R34)
420/85R34	142A8 (139B)	(16.9R34)
460/85R34	147A8 (144B)	(18.4R34)
320/85R38	129A8 (126B)	(12.4R38)
340/85R38	133A8 (130B)	(13.6R38)
380/80R38	142A8 (142B)	
380/85R38	144A8 (144B)	(14.9R38)
400/75R38	134A8 (131B)	(15.5R38)*
420/85R38	144A8 (141B)	(16.9R38)
460/85R38	149A8 (146B)	(18.4R38)
520/85R38	155A8 (152B)	(20.8R38)
480/80R42	151A8 (151B)	(18.4R42)
520/85R42	157A8 (157B)	(20.8R42)
480/80R46	158A8 (158B)	(18.4R46)
520/85R46	158A8 (158B)	(20.8R46)
480/80R50	159D	

* = In preparation



TM for DRIVE WHEELS

TM100

The narrow tyre of the Trelleborg range.

KEY FEATURES:

- row crop working
- comfortable ride

230/95R32	128A8 (128B)
270/95R32	136A8 (136B)
230/95R36	130A8 (130B)
270/95R38	140A8 (140B) *
210/95R44	120A8 (120B)
230/95R44	134A8 (134B)
270/95R44	142A8 (142B)
300/95R46	148A8 (148B)
230/95R48	136A8 (136B)
270/95R48	144A8 (144B)
380/90R50	151A8 (151B)
300/95R52	151A8 (151B) *
380/90R54	152A8 (152B)

* = In preparation



TM for DRIVE WHEELS

TM300S

The particularly deep lugs and their special shape give the TM300S powerful grip. Perfect tyre for all types of heavy work, on wet or difficult surfaces.

13.6R36	127A8 (124B)
---------	--------------



TM for DRIVE WHEELS

TM190

Suitable for many different operations and soil types.

KEY FEATURES:

- top performer in long term use both on field and on road
- reduced lug height offering very good performance on grassland
- high resistance to impacts

7.50R20	6 PR
9.5R20	8 PR
8.3R24	8 PR
9.5R24	107A8
12.4R36	124A8 (121B)



TM for DRIVE WHEELS

Marshland

Specialized line for use on waterlogged and marshy terrain. The extremely deep lugs, together with the structure of the carcass, provide high traction and flotation.

380/85R38	139A8 (139B)
420/85R38	144A8 (144B)
460/85R38	149A8 (149B)



TM for HARVESTERS

TM3000

New

BLUE TIRE TECHNOLOGY

The new TM3000 is Trelleborg's answer to the latest and future generations of Harvesters and Combine machines. Matching sustainable and precision farming approaches, the TM3000 BLUE TIRE is the right choice to boost harvesting productivity.

650/75R32	178A8 *
IF 800/65R32	CFO 178A8
IF 800/70R32	CFO 182A8
IF 800/70R38	CFO 184A8 *

* = In preparation



TM for HARVESTERS

TM2000

This line represents the latest generation of radial tyre for harvesting machines.

KEY FEATURES:

- Maximum resistance to impact and puncturing
- Optimal lateral stability
- High load capacity
- Excellent traction capacity

620/75R26	166A8	(23.1R26)
650/75R32	172A8	(24.5R32)
710/75R32	177A8	
800/65R32	178A8	(30.5LR32)
900/60R32	181A8	



Cross ply range Tractor Tyres



TWIN TRACTOR

T414

The tyre range ideal for tractors and harvesters.

KEY FEATURES:

- increased output from tractors and pulling machines
- maximum traction
- excellent self-cleaning

400/55-17.5	125A8 (122B)
500/60-26.5	141A8 (138B)
600/55-26.5	148A8 (145B)
600/55-30.5	150A8 (147B)
600/60-30.5	153A8 (150B)
750/45-30.5	143A8 (140B)
750/50-30.5	159A8 (156B)
800/55-30.5	172A8 (168B)
900/60-32	176A8 (173B)
650/60-38	161A8 (157B)
710/65-38	162A8 (158B)
850/50-38	163A8 (160B)
850/60-38	175A8 (172B)
850/55-42	161A8 (157B)



Radial range Twin Radial



Cross ply range Twin Tyres



TWIN RADIAL for TRAILERS

Twin Radial

The radial implement tyre, which is perfect in all working conditions.

KEY FEATURES:

- great comfort and excellent, even wear
- excellent self-cleaning
- reduced fuel consumption
- excellent ground care

500/60R22.5	155D
560/60R22.5	161D
580/65R22.5	159D
600/50R22.5	159D
600/55R26.5	165D
680/55R26.5	165D
710/50R26.5	170D
650/65R30.5	176D
750/60R30.5	181D
850/50R30.5	182D



TWIN IMPLEMENT

T423



T421



T404



T478

Complete range of low ground pressure tyres for machines and implements in the most severe and heavy agricultural service.

KEY FEATURES:

- large ground contact area for minimum soil compaction
- low ground pressure
- low rolling resistance on soft ground
- good lateral stability

280/60-15.5	115A8	T421
280/60-15.5	125A8	T421
280/60-15.5	128A8	T478
400/60-15.5	145A8	T404
400/60-15.5	148A8	T404
400/60-15.5	145A8	T478
420/55-17	133A8	T421
400/55-17.5	131A8	T404
400/55-22.5	147A8	T404
500/45-22.5	146A8	T404
500/60-22.5	155A8	T404
500/60-22.5	155A8	T421
560/45-22.5	154A8	T404
560/60-22.5	158A8	T404
560/60-22.5	167A8	T404
600/50-22.5	156A8	T404
600/50-22.5	156A8	T423
710/40-22.5	158A8	T404
400/60-26.5	147A8	T404
500/60-26.5	159A8	T421
600/55-26.5	166A8	T404
600/55-26.5	166A8	T421
710/45-26.5	169A8	T404
710/45-26.5	169A8	T423 MK2
800/40-26.5	172A8	T404
800/40-26.5	172A8	T423 MK2
600/60-30.5	171A8	T421
650/65-30.5	173A8	T404
710/50-30.5	175A8	T404
710/50-30.5	175A8	T423
750/60-30.5	178A8	T404
800/45-30.5	178A8	T404
800/45-30.5	178A8	T423
850/50-30.5	179A8	T404



TWIN AMPT

T421



T428



T423



T422

Agricultural multi purpose and low ground pressure tyres for field and road.

MAIN APPLICATIONS:

- use at speeds up to 70 km/h as well as in heavy duty applications
- for machines and implements with high road use

620/50B22.5	160D	T423
650/45B22.5	160D	T422
710/40B22.5	161D	T423
620/55B26.5	166D	T421
650/55B30.5	168D	T428
750/50B30.5	173D	T428
850/45B30.5	176D	T423



Trelleborg. Five hundred kilograms of lightness.



TWIN GARDEN TRACTOR

T404 T409

Low ground pressure tyre especially designed for grass and other delicate surfaces.

KEY FEATURES:

- maximum flexibility both on hard and soft ground
- great soil respect for minimum compaction and no track formation

New LI 400/55-17.5	108A8	T404 *
New LI 400/55-22.5	111A8	T404 *
New LI 500/45-22.5	117A8	T404 *
New LI 500/60-22.5	126A8	T404 *
New LI 560/45-22.5	125A8	T404 *
560/60-22.5	134A8	T404
23.1-26	145A8	T409
New LI 600/60-30.5	142A8	T404 *

* = In preparation



Cross ply range Implement Standard & High Speed Tyres



AW305



IMPLEMENT STANDARD

RT HS



AF302

AW305, AF302, T452: Implement standard lines, metric size marked, tubeless and load/speed index rated, recommended for trailers.



T452

KEY FEATURES:

- soft ground contact
- low rolling resistance on road transport
- wide range of sizes



**AW309
Flotation**

RT HS: high speed tyre for general purpose use, both for implements and trailers.

200/95-12	97A8	T307
200/95-12	101A8	AF302
260/90-13	121A8	AF302
260/70-15.3	116A8	AW305
260/70-15.3	126A8	AW305
260/70-15.3	131A8	AW305
300/80-15.3	123A8	T452
300/80-15.3	141A8	T452
300/80-15.3	132A8	AW305
300/80-15.3	141A8	AW305
320/80-15.3	145A8	AW305
180/90-16	100A8	AF302
190/90-16	108A8	AF302
200/90-16	111A8	AF302
210/95-16	120A8	AF302
260/70-16	134A8	AW305
340/55-16	140A8	AW305
360/65-16	148A8	AW305
360/70-16	137A8	AW305
380/55-17	138A8	AW305
480/45-17	146A8	AW305
420/55-17	143A8	T452
500/50-17	149A8	AW309
520/50-17	159A8	T306
10.0/80-12	8 PR	AW305
10.0/80-12	10 PR	AW305
555/45-17	154F	RT HS



Cross ply range Forestry Tyres



AGRO FOREST

T410

Designed for mixed forestry and agricultural service.

KEY FEATURES:

- good traction
- good load capability
- good durability in agricultural operations



T404

TWIN FORESTRY

The advanced tyre technology applied to develop performance for the forestry range.



T421 SB

KEY FEATURES:

- brilliant stability and comfort
- reliability
- best possible pull force and accessibility



T414



T422 SB



T428 SB

600/50-22.5 LS2	149A8	T428 SB
650/45-22.5 LS2	150A8	T422 SB
710/40-22.5 LS2	151A8	T428 SB
710/40-24.5 LS2	163A8	T428 SB
New 600/55-26.5 LS2	165A8	T422 SB
New 600/55-26.5 LS2	165A8	T428 SB
710/45-26.5 LS2	163A8	T422 SB
710/45-26.5 LS2	163A8	T428 SB
710/45-26.5 LS2	168A8	T422 SB
710/45-26.5 LS2	168A8	T428 SB
750/50-26.5 LS2	174A8	T428 SB
710/50-30.5 LS2	173A8	T428 SB
750/45-30.5 LS2	173A8	T428 SB
600/65-34 LS2	157A8	T422 SB
710/55-34 LS2	161A8	T422 SB
400/60-15.5	14 PR	T404
500/45-22.5	129A8	T404
500/60-22.5	144A8	T421 SB
600/60-30.5	153A8	T414



FORESTRY SKIDDER

**T418
Skidder**

Trelleborg T418 is the perfect tyre for heavy-duty logging service. It is specifically designed for log skidding service with maximum penetration and tear resistance to provide longer tyre life under the most severe operating conditions. The armored plies protect the carcass against stumps, boulders and rocks.

23.1-26	16 PR
28L-26	20 PR
24.5-32	16 PR
30.5L-32	20 PR
30.5L-32	26 PR
35.5L-32	24 PR *

* = In preparation



Rear Tractor Tyres



TRACTOR AGRO INDUSTRIAL

TH400

New radial line designed for telescopic handlers, backhoes and compact loaders. The TH400 represents the perfect solution both for farming and for light industrial applications.

KEY FEATURES:

- great stability
- excellent safety
- maximum resistance to stress and laceration
- superior traction
- outstanding self-cleaning

340/80R18	IND	143A8 (143B)	(12.5-18)
400/70R18	IND	147A8 (147B)	(15.5/70-18)
400/70R20	IND	149A8 (149B)	(16.0/70-20)
400/70R24	IND	152A8 (152B)	(16.0/70-24)
440/80R24	IND	161A8 (161B)	(16.9-24)
460/70R24	IND	159A8 (159B)	(17.5L-24)
500/70R24	IND	164A8 (164B)	(19.5L-24)
480/80R26	IND	160A8 (160B)	(18.4-26)
440/80R28	IND	156A8 (156B)	(16.9-28)



TRACTOR INDUSTRIAL

TB40

First two dimensions of the new Trelleborg backhoe range. Designed for construction utility and industrial applications.

KEY FEATURES:

- excellent wear resistance
- sturdy tread pattern
- robust sidewall
- great stability on hard and tough soils

320/80-18	IND	R-4	139A8	(12.5-18)
340/80-18	IND	R-4	143A8	*
440/80-28	IND	R-4	156A8	(16.9-28)

* = In preparation



TRACTOR INDUSTRIAL

T409

The special tread design and the tyre construction characteristic, make it ideal for road work.

23.1-26	158A8	T409
---------	-------	------



TRACTOR INDUSTRIAL

T428 EXC



T422 EXC



T459

Recommended for excavators, loaders and for machines in urban and industrial operations.

KEY FEATURES:

- good grip
- braking capability on hard surfaces

New	600/50-22.5	161A8	T428 EXC
New	650/45-22.5	162A8	T422 EXC
New	710/40-22.5	163A8	T428 EXC
	420/70B24	154A8	T459
	480/70B28	157A8	T459
	520/70B30	162A8	T459
	520/70B34	171A8	T459
	620/60B34	175A8	T459



Tyres for light service Farming, Industrial & Green Areas

Wide range of tyres from 3'' to 16'' developed for farming, industrial and green area applications. Also available as complete wheel systems.

T49



T63



T94



T411



T412



T413



T415



T421



T439



T446



T448



T462



T463



T501



T510



T513



T522



T523



T528



T530



T533



T536



T537



T539



T550



T559 Turf Grip



T560 ICE



T690



H700



T991



HIGH GRIP




TRACTION





Rims & complete wheel systems Forestry, Agricultural, Industrial & Earth Moving

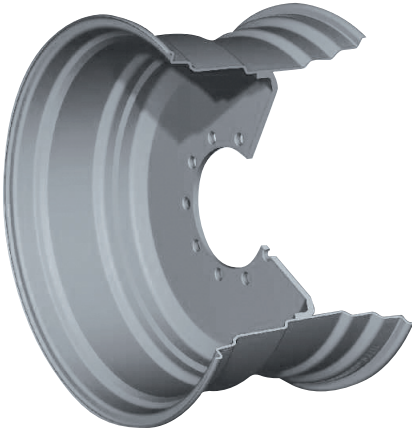

Trelleborg Wheel Systems produce high quality rims for forestry, agricultural, industrial and earth moving applications with diameters from 3 to 46 inches.

Each wheel is developed in accordance with:

- customer requests for both small and large volumes
- total quality standard
- absolute precision and rim calibration

DU0500 mounted on the tractor wheel



- Easy to maintain and service
- Easy to mount and demount
- Attached rim and drum for easy handling
- Painted in the original colour of the tractor

THK



Trelleborg High Knurling - THK handles high stress and extreme torque, enabling tractors to work at maximum efficiency and productivity.

Together with Trelleborg Extra Large tyres, THK represents a system that meets all requirements.

The knurling has been increased by 50% compared to the standard version; this, combined with the special black paint, maximises the friction characteristics of the rim when the tyre is fitted.

THK is approved for tractors up to 400 hp.



Trelleborg is a world leader in engineered polymer solutions that seal, damp and protect critical applications in demanding environments. Our innovative engineered solutions accelerate performance for customers in a sustainable way. The Trelleborg Group has local presence in over 40 countries around the world.

WWW.TRELLEBORG.COM/WHEELSYSTEMS



facebook.com/TrelleborgAgri
twitter.com/TrelleborgAgri
youtube.com/TrelleborgAgri
flickr.com/TrelleborgAgri
linkedin.com



Trelleborg Wheel Systems UK Ltd
1 Redwing Court - Willow Farm Business Park
Castle Donington, Derby DE74 2UH
Tel: +44 (0) 1530 565656 - Fax: +44 (0) 1530 565630
www.trelleborg.com/wheelsystems/uk